

10-02-00

A

**UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.
13931Total Pages in this Submission
3**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**DEGREE OF OUTLIER CALCULATION DEVICE, AND PROBABILITY DENSITY ESTIMATION DEVICE
AND FORGETFUL HISTOGRAM CALCULATION DEVICE FOR USE THEREIN**

and invented by:

Kenji Yamanishi, et alIf a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 58 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications *(if applicable)*
 - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
 - d. ☐ Reference to Microfiche Appendix *(if applicable)*
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings *(if drawings filed)*
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
13931

Total Pages in this Submission
3

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal Number of Sheets 10
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)* ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail *(Specify Label No.):* EL-680-252-143-US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
13931

Total Pages in this Submission
3

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

16. ☐ Additional Enclosures *(please identify below):*

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	16	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	15	- 3 =	12	x \$78.00	\$936.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE <i>(specify purpose)</i>					\$0.00
TOTAL FILING FEE					\$1,626.00

- ☒ A check in the amount of \$1,626.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-1013 SSMP as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Signature

Paul J. Esatto, Jr.
Registration No. 30,749
Scully, Scott, Murphy & Presser
400 Garden City Plaza
Garden City, New York 11530
(516) 742-4343

Dated: September 29, 2000

CC:

DEGREE OF OUTLIER CALCULATION DEVICE, AND PROBABILITY
DENSITY ESTIMATION DEVICE AND HISTOGRAM CALCULATION
DEVICE FOR USE THEREIN

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to a degree of outlier calculation device, and a probability density estimation device and a histogram calculation device for use therein and, more particularly, to statistical outlier detection, fraud detection and fraud detection techniques for detecting an abnormal value or an outlier which largely deviates from data patterns obtained so far from multi-dimensional time series data.

DESCRIPTION OF THE RELATED ART

Such a degree of outlier calculation device is for use in finding an abnormal value or an outlier which largely deviates from data patterns obtained so far from multi-dimensional time series data and is employed, for example, in a case of finding such fraud behavior as so-called cloning use from a record of cellular phone services and in a case of finding abnormal transaction from a use history of a credit card.

Well-known conventional fraud detection methods using a machine learning technique include the method by T. Fawcett and F Provost ("Combining Data Mining and

Machine Learning for Effective Fraud Detection,
Proceedings of AI Approaches to Fraud Detection and Risk
Management, pp. 14-19, 1997") and the method by J. Ryan,
M. Lin and R. Miikkulainen ("Intrusion Detection with
5 Neural Networks, Proceedings of AI Approaches to Fraud
Detection and Risk Management, pp. 72-77, 1997").

Among the above methods, one that makes use of an
idea of statistical outlier detection, in particular, is
the method by P. Burge and J. Shawe-Taylor ("Detecting
10 Cellular Fraud Using Adaptive Prototypes, Proceedings of
AI Approaches to Fraud Detection and Risk Management, pp.
9-13, 1997").

As a learning algorithm for a parametric finite
mixture model, well-known is the EM Algorithm by A.P.
15 Dempster, N.M Laird and D.B. Rubin ("Maximum Likelihood
from Incomplete Data via the EM Algorithm, Journal of
the Royal Statistical Society, B, 39(1), pp. 1-38,
1977").

As a learning algorithm for a normal kernel
20 mixture distribution (a mixture of a finite number of
the same normal distributions), the prototype updating
algorithm by I. Grabec is known ("Self-Organization of
Neurons Described by the Maximum-Entropy Principle,
Biological Cybernetics, vol. 63, pp. 403-409, 1990").

25 The above-described methods by T. Fawcett and F.
Provost and by J. Ryan, M. Lin and R. Miikkulainen
relate to fraud detection realized by learning unfair

006260-45952960

detection patterns from data whose fraud is known (so-called supervised data). In practice, however, it is so difficult to obtain sufficient unfair data that highly precise learning can not be conducted to result in a decrease in fraud detection precision.

The method by P. Burge and J. Shawe-Taylor relates to similar fraud detection based on unsupervised data. This method, however, conducts fraud detection with two non-parametric models, a short-term model and a long-term model, to make a distance between them as a criterion for an outlier. Statistical basis of the short-term model and the long-term model is insufficient to make statistical significance of a distance therebetween unclear.

In addition, preparation of two models, short-term and long-term models, deteriorates calculation efficiency. Further problems are involved such as a problem that only continuous value data can be handled and not categorical data and a problem that since only non-parametric models are handled, fraud detection is unstable and inefficient.

Although as a learning algorithm for a statistical model, the EM algorithm by A.P. Dempster, N.M. Laird and D.B. Rubin and the prototype updating algorithm by I. Grabec are known, since these algorithms learn from all the past data equally weighted, they fail to cope with a pattern change.

SUMMARY OF THE INVENTION

5 An object of the present invention is to provide a degree of outlier calculation device capable of automatically detecting fraud based on data whose fraud is yet to be known (unsupervised data), and a probability density estimation device and a histogram calculation device for use therein.

10 Another object of the present invention is to provide a degree of outlier calculation device which adopts an outlier determination criteria whose statistical significance is clear and uses a model including short-term and long-term models combined into one, thereby improving efficiency of calculation, coping with categorical data and enabling stable and efficient
15 outlier detection using not only a non-parametric model but also a parametric model, and a probability density estimation device and a histogram calculation device for use therein.

20 A further object of the present invention is to provide a degree of outlier calculation device which realizes in the device an algorithm learning while forgetting past data by weighting less on older data to enable even a change in pattern to be flexibly followed,
25 and a probability density estimation device and a histogram calculation device for use therein.

According to the first aspect of the invention,

for use in a degree of outlier calculation device for sequentially calculating a degree of outlier of each data with a data sequence of real vector values as input, a probability density estimation device for, while
5 sequentially reading the data sequence, estimating a probability distribution of the data in question by using a finite mixture of normal distributions (normal mixture for short), comprises

probability calculation means for calculating,
10 based on a value of input data and values of a mean parameter and a variance parameter of each of a finite number of normal distribution densities, a probability of generation of the input data in question from each normal distribution, and

15 parameter rewriting means for updating and rewriting the stored parameter values while forgetting past data, according to newly read data based on a probability obtained by the probability calculation means, values of a mean parameter and a variance
20 parameter of each normal distribution and a weighting parameter of each normal distribution.

In the preferred construction, the probability density estimation device further comprises

parameter storage means for storing values of a
25 mean parameter and a variance parameter of each of a finite number of normal distribution densities and a weighting parameter of each normal distribution, wherein

the parameter rewriting means updates and rewrites data of the parameter storage means.

According to the second aspect of the invention, a degree of outlier calculation device for sequentially
5 detecting a degree of outlier of each data with a data sequence of real vector values as input, comprises

a probability density estimation device for, while sequentially reading the data sequence, estimating a probability distribution of generation of the data in
10 question by using a finite mixture of normal distributions including

(a) parameter storage means for storing values of a mean parameter and a variance parameter of each of a finite number of normal distribution densities and a
15 weighting parameter of each normal distribution,

(b) probability calculation means for calculating, based on a value of input data and values of a mean parameter and a variance parameter of each of a finite number of normal distribution densities, a probability
20 of generation of the input data in question from each normal distribution, and

(c) parameter rewriting means for updating and rewriting the stored parameter values while forgetting past data, according to newly read data based on a
25 probability obtained by the probability calculation means, values of a mean parameter and a variance parameter of each normal distribution and a weighting

006260" 2E95/960

parameter of each normal distribution, and

degree of outlier calculation means for calculating and outputting a degree of outlier of the data by using a parameter of the normal mixture updated by the probability density estimation device and based on a probability distribution estimated from values of the parameters before and after the updating and the input data.

According to the third aspect of the invention, a probability density estimation device for use in a degree of outlier calculation device to, while sequentially reading a data sequence, estimate a probability distribution of generation of the data in question by using a finite number of normal kernel distributions, comprises

parameter storage means for storing a value of a parameter indicative of a position of each kernel, and

parameter rewriting means for reading a value of a parameter from the storage means and updating the stored parameter values while forgetting past data, according to newly read data to rewrite the contents of the parameter storage means.

According to another aspect of the invention, a degree of outlier calculation device for sequentially calculating a degree of outlier of each data with a data sequence of real vector values as input, comprises

a probability density estimation device for,

while sequentially reading the data sequence, estimating a probability distribution of generation of the data in question by using a finite number of normal kernel distributions including

5 (a) parameter storage means for storing a value of a parameter indicative of a position of each kernel, and

10 (b) parameter rewriting means for reading a value of a parameter from the storage means and updating the stored parameter values while forgetting past data, according to newly read data to rewrite the contents of the parameter storage means, and

15 degree of outlier calculation means for calculating and outputting a degree of outlier of the data by using the parameter updated by the probability density estimation device and based on a probability distribution estimated from values of the parameters before and after the updating and the input data.

20 According to another aspect of the invention, for use in a degree of outlier calculation device for sequentially calculating a degree of outlier of each data with discrete value data as input, a histogram calculation device for calculating a parameter of a histogram with respect to the discrete value data

25 sequentially input, comprises

storage means for storing a parameter value of the histogram, and

parameter updating means for reading the
parameter value from the storage means and updating past
parameter values while forgetting past data based on
input data to rewrite the value of the storage means,
5 thereby outputting some of parameter values of the
storage means.

According to another aspect of the invention, a
degree of outlier calculation device for sequentially
calculating a degree of outlier of each data with
10 discrete value data as input, comprises

a histogram calculation device for calculating a
parameter of a histogram with respect to the discrete
value data sequentially input including

storage means for storing a parameter value of
15 the histogram, and

parameter updating means for reading the
parameter value from the storage means and updating past
parameter values while forgetting past data based on
input data to rewrite the value of the storage means,
20 thereby outputting some of parameter values of the
storage means, and

score calculation means for calculating, based on
the output of the histogram calculation device and the
input data, a score of the input data in question with
25 respect to the histogram, thereby outputting the output
of the score calculation means as a degree of outlier of
the input data.

According to another aspect of the invention, a degree of outlier calculation device for calculating a degree of outlier with respect to sequentially input data which is described both in a discrete value and in a continuous value , comprises

a histogram calculation device for estimating a histogram with respect to a discrete value data part,

probability density estimation devices provided as many as the number of cells of the histogram for estimating a probability density with respect to a continuous value data part,

cell determination means for determining to which cell of the histogram the discrete value data part belongs to send the continuous data part to the corresponding one of the probability density estimation devices, and

score calculation means for calculating a score of the input data based on a probability distribution estimated from output values of the histogram calculation device and the probability density estimation device and the input data, thereby

outputting the output of the score calculation means as a degree of outlier of the input data,

the histogram calculation device including storage means for storing a parameter value of the histogram, and

parameter updating means for reading the

parameter value from the storage means and updating past
parameter values while forgetting past data based on
input data to rewrite the value of the storage means,
thereby outputting some of parameter values of the
storage means, and

the probability density estimation device
including

parameter storage means for storing values of a
mean parameter and a variance parameter of each of a
finite number of normal distribution densities and a
weighting parameter of each normal distribution,

probability calculation means for calculating,
based on a value of input data, and values of a mean
parameter and a variance parameter of each of a finite
number of normal distribution densities, a probability
of generation of the input data in question from each
normal distribution, and

parameter rewriting means for updating and
rewriting the stored parameter values while forgetting
past data, according to newly read data based on a
probability obtained by the probability calculation
means, values of a mean parameter and a variance
parameter of each normal distribution and a weighting
parameter of each normal distribution.

According to another aspect of the invention, a
degree of outlier calculation device for calculating a
degree of outlier with respect to sequentially input

data which is described both in a discrete value and in a continuous value , comprises

a histogram calculation device for estimating a histogram with respect to the discrete value data part,

5 probability density estimation devices provided as many as the number of cells of the histogram for estimating a probability density with respect to a continuous value data part,

10 cell determination means for determining to which cell of the histogram the discrete value data part belongs to send the continuous data part to the corresponding one of the probability density estimation devices, and

15 score calculation means for calculating a score of the input data based on a probability distribution estimated from output values of the histogram calculation device and the probability density estimation device and the input data, thereby

20 outputting the output of the score calculation means as a degree of outlier of the input data,

the histogram calculation device including

storage means for storing a parameter value of the histogram, and

25 parameter updating means for reading the parameter value from the storage means and updating past parameter values while forgetting past data based on input data to rewrite the value of the storage means,

006260-2592950

thereby outputting some of parameter values of the storage means, and

the probability density estimation device including

5 parameter storage means for storing a value of a parameter indicative of a position of each kernel, and

parameter rewriting means for reading a value of a parameter from the storage means and updating the stored parameter values while forgetting past data,
10 according to newly read data to rewrite the contents of the parameter storage means.

According to another aspect of the invention, for use in a degree of outlier calculation device for sequentially calculating a degree of outlier of each data with a data sequence of real vector values as input,
15 a probability density estimation method of, while sequentially reading the data sequence, estimating a probability distribution of generation of the data in question by using a finite mixture of normal
20 distributions, comprising the steps of

based on values of a mean parameter and a variance parameter of each of a finite number of normal distribution densities read from parameter storage means for storing a value of input data, values of a mean
25 parameter and a variance parameter of each of a finite number of normal distribution densities, and a weighting parameter of each normal distribution, calculating a

probability of generation of the input data in question from each normal distribution, and

updating the stored parameter values while forgetting past data, according to newly read data based on a probability obtained by the probability calculation means, values of a mean parameter and a variance parameter of each normal distribution and a weighting parameter of each normal distribution to rewrite data of the parameter storage means.

According to another aspect of the invention, a degree of outlier calculation method of sequentially calculating a degree of outlier of each data, with a data sequence of real vector values as input, wherein

probability density estimation for, while sequentially reading the data sequence, estimating a probability distribution of generation of the data in question by using a finite mixture of normal distributions, comprises the steps of:

based on values of a mean parameter and a variance parameter of each of a finite number of normal distribution densities read from parameter storage means for storing a value of input data, values of a mean parameter and a variance parameter of each of a finite number of normal distribution densities, and a weighting parameter of each normal distribution, calculating a probability of generation of the input data in question from each normal distribution, and

updating the stored parameter values while
forgetting past data, according to newly read data based
on a probability obtained by the probability calculation
means, values of a mean parameter and a variance
5 parameter of each normal distribution and a weighting
parameter of each normal distribution to rewrite data of
the parameter storage means, and which further comprises
the step of:

calculating and outputting a degree of outlier of
10 the data by using a parameter of the normal mixture
updated by the probability density estimation and based
on a probability distribution estimated from values of
the parameters before and after the updating and the
input data.

15 According to another aspect of the invention, a
probability density estimation method for use in
calculation of a degree of outlier to, while
sequentially reading a data sequence, estimate a
probability distribution of generation of the data in
20 question by using a finite number of normal kernel
distributions, comprising the steps of:

storing a value of a parameter indicative of a
position of each kernel in parameter storage means, and

25 reading a value of a parameter from the storage
means and updating the stored parameter values while
forgetting past data, according to newly read data to
rewrite the contents of the parameter storage means.

006260" 28952960

According to another aspect of the invention, a degree of outlier calculation method of sequentially calculating a degree of outlier of each data, with a data sequence of real vector values as input, wherein

5 probability density estimation for, while sequentially reading the data sequence, estimating a probability distribution of generation of the data in question by using a finite number of normal kernel distributions comprises the steps of:

10 storing a value of a parameter indicative of a position of each kernel in parameter storage means,

reading a value of a parameter from the storage means and updating the stored parameter values while forgetting past data, according to newly read data to
15 rewrite the contents of the parameter storage means, and which further comprises:

degree of outlier calculation means for calculating and outputting a degree of outlier of the data by using the parameter updated by the probability
20 density estimation and based on a probability distribution estimated from values of the parameters before and after the updating and the input data.

According to another aspect of the invention, for use in calculation of a degree of outlier for
25 sequentially calculating a degree of outlier of each data with discrete value data as input, a histogram calculation method of calculating a parameter of a

09675637-096900

histogram with respect to the discrete value data sequentially input, comprising the steps of:

reading the parameter value from storage means for storing a parameter value of the histogram and updating past parameter values while forgetting past data based on input data to rewrite the value of the storage means, and

outputting some of parameter values of the storage means.

According to a further aspect of the invention, a degree of outlier calculation device for sequentially calculating a degree of outlier of each data with discrete value data as input, comprising:

a histogram calculation device for calculating a parameter of a histogram with respect to the discrete value data sequentially input including

storage means for storing a parameter value of the histogram, and

parameter updating means for reading the parameter value from the storage means and updating past parameter values while forgetting past data based on input data to rewrite the value of the storage means, thereby outputting some of parameter values of the storage means, and

score calculation means for calculating, based on the output of the histogram calculation device and the input data, a score of the input data in question with

respect to the histogram, thereby outputting the score calculation result as a degree of outlier of the input data.

5 According to a still further aspect of the invention, a degree of outlier calculation method of calculating a degree of outlier with respect to sequentially input data which is described both in a discrete value and in a continuous value , wherein

10 histogram calculation which estimates a histogram with respect to a discrete value data part comprises the steps of:

15 reading the parameter value from storage means for storing a parameter value of the histogram and updating past parameter values while forgetting past data based on input data to rewrite the value of the storage means, and

outputting some of parameter values of the storage means, and wherein

20 in probability density estimation devices provided as many as the number of cells of the histogram for estimating a probability density with respect to a continuous value data part, the method comprises the steps of:

25 based on values of a mean parameter and a variance parameter of each of a finite number of normal distribution densities read from parameter storage means for storing a value of input data, values of a mean

parameter and variance parameter of each of a finite
number of normal distribution densities and a weighting
parameter of each normal distribution, calculating a
probability of generation of the input data in question
5 from each normal distribution, and

based on a probability obtained by the
probability calculation means, values of a mean
parameter and a variance parameter of each normal
distribution and a weighting parameter of each normal
10 distribution, updating the stored parameter values while
forgetting past data, according to newly read data to
rewrite the data of the parameter storage means, and
wherein the method further comprises the steps of:

determining to which cell of the histogram the
15 discrete value data part belongs to send the continuous
data part to the corresponding one of the probability
density estimation devices,

calculating a score of the input data based on a
probability distribution estimated from output values of
20 the histogram calculation device and the probability
density estimation device and the input data, and

outputting the score calculation result as a
degree of outlier of the input data.

In the present invention, with one value of time
25 series data as x , assuming that input data is multi-
divisional data, the contents of x include, for example,
one real number, an attribute of a discrete value of a

multi-divisional real number value vector and a multi-divisional vector having the foregoing elements. In a case of cellular phone, x may be expressed as follows which is one example only:

5 x = (telephone service start time, telephone service duration time and origin of service)

09675637-096900
10 A probability density function of a probability distribution followed by x represents character of a data generation mechanism (e.g. telephone service pattern of user). The degree of outlier calculation device according to the present invention learns a probability density function every time time series data is applied. Under these circumstances, it is assumed that a "degree of outlier" is basically calculated based on the two ideas (A) and (B) shown below.

15 A) A degree of outlier of one input data is calculated based on the amount of a change in a learned probability density from that before learning caused as a result of taking in the input data. This is on the premise that data largely differing in tendency from a learned probability density function is considered to have a high degree of outlier. More specifically, a function of a distance between probability densities before and after data input is calculated as a degree of outlier.

20 B) A likelihood of a probability density function so far obtained by learning with respect to input data is calculated (value of the probability density function

with respect to the input data). It can be understood that larger the likelihood is, the higher the degree of outlier is. In practice, a value obtained by adding a negative sign to a logarithm of the likelihood (negative logarithmic likelihood) is output as a degree of outlier.

In addition, a combination of the above two functions and the like can be used. As described in the foregoing, the device according to the present invention represents statistical character of a data generation mechanism by a probability density function (the function of a probability density estimation device) and based thereon, calculates and outputs how input data deviates from the character of the data generation mechanism as a "degree of outlier" (the function of the degree of outlier calculation device).

Other objects, features and advantages of the present invention will become clear from the detailed description given herebelow.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood more fully from the detailed description given herebelow and from the accompanying drawings of the preferred embodiment of the invention, which, however, should not be taken to be limitative to the invention, but are for explanation and understanding only.

In the drawings:

Fig. 1 is a diagram showing a structure of one example of a probability density estimation device (normal mixture) according to the present invention;

5 Fig. 2 is a flow chart showing operation of the device illustrated in Fig. 1;

Fig. 3 is a diagram showing a structure of an example of a degree of outlier calculation device using the device of Fig. 1;

10 Fig. 4 is a flow chart of operation of the device illustrated in Fig. 3;

Fig. 5 is a diagram showing a structure of one example of a probability density estimation device (kernel mixture) according to the present invention;

15 Fig. 6 is a flow chart of operation of the device illustrated in Fig. 5;

Fig. 7 is a diagram showing a structure of an example of a degree of outlier calculation device using the device of Fig. 6;

20 Fig. 8 is a flow chart of operation of the device illustrated in Fig. 7;

Fig. 9 is a diagram showing a structure of one example of a histogram calculation device according to the present invention;

25 Fig. 10 is a flow chart of operation of the device illustrated in Fig. 9;

Fig. 11 is a diagram showing a structure of an example of a degree of outlier calculation device using

00675637-09900

the device of Fig. 10;

Fig. 12 is a flow chart of operation of the device illustrated in Fig. 11;

5 Fig. 13 is a diagram showing a structure of an example of a degree of outlier calculation device using the devices of Figs. 1 and 9;

Fig. 14 is a flow chart of operation of the device illustrated in Fig. 13;

10 Fig. 15 is a diagram showing a structure of an example of a degree of outlier calculation device using the devices of Figs. 5 and 9;

Fig. 16 is a flow chart of operation of the device illustrated in Fig. 15.

15 DESCRIPTION OF THE PREFERRED EMBODIMENT

The preferred embodiment of the present invention will be discussed hereinafter in detail with reference to the accompanying drawings. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be obvious, however, to those skilled in the art that the present invention may be practiced without these specific details. In other instance, well-known structures are not shown in detail in order to unnecessary obscure the present invention.

20

25

First, description will be made of a probability density estimation device using a normal mixture. Assume

that data x (d -dimensional vector value) is generated according to the following Expression 1 as a probability distribution:

$$p(x|\theta) = \sum_{i=1}^k c_i p(x|\mu_i, \Sigma_i) \quad \text{-----}(1)$$

In the expression, holds the following:

$$p(x|\mu_i, \Sigma_i) = \frac{1}{(2\pi)^{d/2} |\Sigma_i|^{1/2}} \exp\left(-\frac{1}{2}(x - \mu_i)^T \Sigma_i^{-1} (x - \mu_i)\right)$$

and μ_i denotes a n -dimensional vector which is a parameter indicative of a mean value of an n -dimensional normal distribution and Σ_i denotes an n -dimensional square matrix which is a parameter indicative of a variance of the n -dimensional normal distribution. c_i denotes a parameter indicative of a weight of a normal distribution. Here, k represents an integer indicative of the number of overlaps and holds the following:

$$c_i = 0 \quad \text{and} \quad \sum_{i=1}^k c_i \geq 1$$

It is also assumed that $\theta = (c_1, \mu_1, \Sigma_1, \dots, c_k, \mu_k, \Sigma_k)$ represents a parameter vector.

Fig. 1 is a block diagram showing a probability

density estimation device according to one embodiment of the present embodiment. Assume here that a constant r ($0 \leq r \leq 1$ and the smaller r becomes, the faster past data is forgotten) indicative of a forgetting speed and k as the number of overlaps of normal distributions are given in advance. In addition, the parameter α ($\alpha > 0$) is also used which is assumed to be given in advance.

In Fig. 1, a parameter storage device 13 is a device for storing the above-described parameter θ , a parameter rewriting device 12 is capable of storing a d -dimensional vector μ_i' and a d -dimensional square matrix Σ_i' as well. The reference numeral 10 represents a data input unit, 11 a probability calculation device for calculating a probability and 14 a parameter output unit.

Fig. 2 is a flow chart showing schematic operation of the block illustrated in Fig. 1 and the device of Fig. 1 operates in a manner as described in the following. First, initialize a value of each parameter stored in the parameter storage device 13 before data reading (Step S10). Next, the device operates in the following manner every time t -th data x_t is input. The input x_t is transferred to and stored in the probability calculation device 11 and the parameter rewriting device 12 (Step 11).

The probability calculation device 11 reads a current value θ of the parameter from the parameter storage device 13, based on the value, calculates each

probability γ_i ($i = 1, 2, \dots, k$) that each normal distribution generates the data x_t according to the following [Expression 4] (Step S12) and sends the calculation result to the parameter rewriting device 12:

5

$$\gamma_i := (1 - \alpha r) \frac{c_i p(x_t | \mu_i, \Sigma_i)}{\sum_{i=1}^k c_i p(x_t | \mu_i, \Sigma_i)} + \frac{\alpha r}{k}$$

10

The parameter rewriting device 12 reads the current parameter value from the parameter storage device 13 while sequentially calculating an updating result of the parameter value with respect to each of $i = 1, 2, \dots, k$ in a manner as shown in the following expressions (2) to (6) by using the received probability γ_i to rewrite the parameter values stored in the parameter storage device 13 (Step S13). In these expressions (2) to (6), the sign "!=" signifies that a right-side term is to substitute for a left-side term.

15

$$c_i := (1 - r)c_i + r\gamma_i \quad \text{----- (2)}$$

$$\mu_i := (1 - r)\mu_i' + r\gamma_i \cdot x_t \quad \text{----- (3)}$$

$$\mu_i := \frac{\mu_i'}{c_i} \quad \text{----- (4)}$$

$$\Sigma_i' := (1 - r)\Sigma_i' + r\gamma_i \cdot x_t x_t^T \quad \text{----- (5)}$$

$$\Sigma_i := \frac{\Sigma_i'}{c_i} - \mu_i \mu_i^T \quad \text{----- (6)}$$

20

Then, the parameter storage device 13 outputs the

rewritten parameter values (Step S14). The updating rule is equivalent to maximization of a logarithmic likelihood having a weight of $(1-r)^1$ with respect to the (t-1)th data and realizes such estimation as made by forgetting past data one by one. This accordingly results in learning using latest $1/r$ number of data (1: positive integer).

This is because a solution of $(1-r)^1 = 1/2$ is expressed as:

$$1 = - (\log 2) / \log(1-r) \sim (\log 2) / r$$

Thus, the probability density expressed by the above Expression (1) and the function is completely designated by a finite number of parameters. Therefore, only the designation of a parameter value is enough for expressing the present probability density function, so that the parameter output unit 14 illustrated in Fig. 1 enables estimation of the probability density function in question. A device for calculating a degree of outlier of input data using thus estimated probability density function is shown in the block diagram of Fig. 3.

Fig. 3 is a block diagram showing one embodiment of a degree of outlier calculation device. The present device includes an input unit 20, a probability density estimation device 21 illustrated in Fig. 1, a score calculation device 22 for calculating a degree of outlier of data, that is, a score, based on a

probability distribution estimated from input data and a parameter from the probability density estimation device 21, and an output unit 23 for outputting the calculation result. The device shown in Fig. 3 operates in the following manner according to a flow chart of Fig. 4 every time t -th data x_t is input.

The input x_t is transferred to the probability density estimation device 21 (normal mixture) and the score calculation device 22 (Step S20) and stored therein. The probability density estimation device 21 updates a value of a stored parameter according to the input data (Step S21) and inputs the new value to the score calculation device 22. The score calculation device 22 calculates a score using the input data, the parameter value and the parameter value handed over in the past (Step S22) and outputs the same (Step S23). A score indicative of a degree of outlier is calculated, for example, using a square distance, a Hellinger distance and further a logarithmic loss.

In the following, the calculation will be described more specifically. In a case where with a parameter $\theta(t)$ estimated from data $x_t = x_1 x_2 \dots x_t$, the expression $p^{(t)}(x) = p(x|\theta(t))$ holds and with respect to probability distributions p and q , $d_s(p, q)$ represents a square distance between the two distributions and $dh(p, q)$ represents a Hellinger distance, any of the followings can be used as a score:

$$d_s(p^{(t)}, p^{(t-1)}) = \int (p^{(t)}(x) - p^{(t-1)}(x))^2 dx$$

$$d_h(p^{(t)}, p^{(t-1)}) = \int (\sqrt{p^{(t)}(x)} - \sqrt{p^{(t-1)}(x)})^2 dx$$

A logarithmic loss can be calculated by the following
expression:

$$- \log p^{(t-1)}(x_t)$$

These can be immediately generalized into $d_s(p^{(t)}, p^{(t-T)})$
etc. with T as a positive integer.

Next, another embodiment of a probability density
estimation device according to the present invention
will be described. In this example, used as a data
generation model is the following expression which is a
kernel mixture distribution:

$$p(x|q) = \frac{1}{k} \sum_{i=1}^k \omega(x; q_i)$$

In the expression, " $\omega(\cdot; \cdot)$ " is called a kernel function
which is provided in the form of the following normal
density function (referred to as normal distribution
kernel):

$$\omega(x: \omega_t) = \frac{1}{(2\pi)^{d/2} |\Sigma|^{1/2}} \exp\left(-\frac{1}{2}(x - q_i)^T \Sigma^{-1} (x - q_i)\right)$$

In the expression, Σ represents a diagonal matrix and the following equation holds:

5 $\Sigma = \text{diag} (\sigma^2, \dots, \sigma^2)$

σ represents an applied positive integer. Each q_i denotes a d-dimensional vector which is a parameter designating a position of each kernel function. $\{q_i\}$ is called prototype. x_m represents an m-th component of x .
10 Similarly, q_{im} represents an m-th component of q_i .

Fig. 5 is a block diagram showing a probability density estimation device using a kernel mixture distribution. A parameter storage device 32 has a function of storing $q = (q_1, q_2, \dots, q_k)$. In Fig. 5, 30 denotes an input unit, 31 a parameter rewriting device and 33 an output unit. The device shown in Fig. 5 operates in the following manner according to a flow chart of Fig. 6. First, prior to data reading, initialize a parameter value stored in the parameter storage device 32 (Step S30). Then, every time t-th data x_t is input, the device operates according to the following procedures. The input x_t is transferred to the parameter rewriting device 31 (Step S31) and stored therein. The parameter rewriting device 31 reads a
15 current parameter value q from the parameter storage device 32 and obtains a solution Δq of the following
20
25

simultaneous linear equations ($k = 1, 2, \dots, K, l = 1, 2, \dots, d$) (δ_{ml} represents a Kronecker delta, that is, when $m = l$, it equals 1 and otherwise equals 0) to rewrite, as $q := q + \Delta q$, the parameter value stored in the parameter storage device 32 (Step S32):

$$\sum_{j=1}^K \sum_{m=1}^d C_{jmk} \Delta_{qjm} = r B_{kl} \quad \text{-----}(7)$$

however

$$B_{kl} = K \cdot (x_t + 1, l - q_{kl}) \exp\left(-\frac{|x_{t+1} - q_k|^2}{4\sigma^2}\right) - \sum_{i=1}^K (q_{il} - q_{kl}) \exp\left(-\frac{|q_i - q_k|^2}{4\sigma^2}\right)$$

$$C_{jmk} = \left(\delta_{ml} - \frac{(q_{kl} - q_{jl})(q_{km} - q_{jm})}{2\sigma^2}\right) \exp\left(-\frac{|q_k - q_j|^2}{4\sigma^2}\right)$$

The parameter storage device 32 outputs the rewritten parameter value (Step S33).

In the foregoing updating rules, r denotes a parameter which controls a forgetting speed. More specifically, a kernel mixture distribution obtained by sequentially adapting the rules in question minimizes a square distance from a probability density expressed as the following expression:

$$\sum_{\tau=2}^t r(1-r)^{t-\tau} w(x:x_\tau) + (1-r)^{t-1} w(x:x_1) \quad \text{-----}(8)$$

The algorithm by I. Grabec adopted by P. Burge and J. Shawe-Taylor corresponds to the above expression with r as a constant replaced by $1/\tau$. In this case, an expression corresponding to Expression (8) will be simply expressed as:

$$\sum_{\tau=1}^t (1/t)w(x:x_{\tau})$$

An example of a degree of outlier calculation device for calculating a degree of outlier of input data using a parameter obtained from the probability density estimation device employing a kernel mixture distribution shown in Fig. 5 is illustrated in Fig. 7. In Fig. 7, 40 represents an input unit, 41 the probability density estimation device shown in Fig. 5, 42 a score calculation device and 43 an output unit.

The device illustrated in Fig. 7 operates according to the following procedures and a flow chart of Fig. 8 every time t -th data x_t is input. The input x_t is transferred to the probability density estimation device 41 (kernel mixture distribution) and the score calculation device 42 (Step S40) and stored therein. The probability density estimation device 41 updates a value of a stored parameter according to the input data and

supplies the new value to the score calculation device 42. The score calculation device 42 calculates a score using the input data, the value of the parameter and values of parameters handed over in the past and outputs the same (Steps S42 and S43). In this case, the same score function as that in the degree of outlier calculation device shown in Fig. 3 can be used.

Fig. 9 is a diagram showing an entire structure of a histogram calculation device according to the present invention. Discrete value data is sequentially input to a parameter updating device 51 to which a histogram storage device 52 is connected which stores a parameter value of a histogram and outputs the same. 50 represents an input unit and 53 represents an output unit.

Fig. 10 is a flow chart showing operation of the device illustrated in Fig. 9. Assume that discrete value data is designated by a number n of variables. Assume here that an n -dimensional data space is divided into a number N of exclusive cells in advance and that a histogram is formed on these cells. Histogram represents a probability distribution with (p_1, \dots, p_N) as a parameter.

Here, p_j satisfies the following equation.

$$\sum_{j=1}^N p_j = 1, p_j \geq 0$$

Here, p_j represents an occurrence probability of a j -th cell. Assume that $T_0(j) = 0$ ($j = 1, \dots, N$), $0 < r < 1$ and $\beta > 0$ are given numbers and that initial parameters are as follows (Step S50):

$$p^{(0)}(1) = \dots = p^{(0)}(N) = 1/N$$

The parameter updating device 51 conducts updating with respect to t -th input data [Step S51] in the following manner (Step S52):

$$T_t(j) = (1-r)T_{t-1}(j) + \delta_t(j)$$
$$p^{(t)}(j) = \frac{T_t(j) + \beta}{(1 - (1-r)^m)/r + N\beta}$$

In the expression, $\delta^t(j)$ takes 1 when the t -th data is input to the j -th cell and otherwise takes 0. This updating is conducted with respect to all the cells.

With $p^{(t)}(1), \dots, p^{(t)}(N)$ as new parameters of the histogram, updating is conducted. These values are sent to the histogram storage device 52. The histogram storage device 52 stores several past parameter values and outputs a part of them (Step S53).

The parameter updating device 51 conducts calculation at each step by multiplying data as of time t before by a weight of $(1-r)^t$. The weighting indicates that the older the data is, the more gradually it is

forgotten and realizes in the device an algorithm learning while forgetting. As a result, it is possible to flexibly follow a change of a user pattern.

A histogram represents a probability distribution on a categorical variable and expresses, similarly to a probability density function on a continuous variable, statistical character of a data generation mechanism. Accordingly, a relationship between the "histogram calculation device" and the "degree of outlier calculation device" is completely the same as that between the above-described "probability density estimation device" and "degree of outlier calculation device". More specifically, the "histogram calculation device" expresses statistical calculation of the data generation mechanism based on which the "degree of outlier calculation device" calculates how much input data deviates from character of the data generation mechanism as a "degree of outlier".

Fig. 11 shows an entire structure of a degree of outlier calculation device using the histogram calculation device illustrated in Fig. 9, and Fig. 12 shows a flow chart of the operation of the device. Discrete value data from an input unit 60 is sequentially input to a histogram calculation device 61 and a score calculation device 62 (Step S61). The score calculation device 62 is connected to the histogram calculation device 61 which outputs a parameter value of

the histogram from the input data (Step S62) and sends the same to the score calculation device 62. With the input data and the output of the histogram calculation device 61 as inputs, the score calculation device 62 calculates a score of a degree of outlier of the input data (Step S63).

As a score calculation method in this case, as well as in a case of continuous value data, a square distance, a Hellinger distance, a logarithmic loss, etc. can be used. In the histogram, a probability value $p^{(t)}(x)$ of data x to be stored in a j -th cell at a time t is calculated as follows:

$$p^{(t)}(x) = p^{(t)}(j)/L_j$$

In the expression, L_j denotes a number of points to be stored in the j -th cell and $p^{(t)}(j)$ denotes a probability value of the j -th cell at the time t . Using the equation, the square distance $ds(p^{(t)}, p^{(t-1)})$ and the Hellinger distance $dh(p^{(t)}, p^{(t-1)})$ are calculated according to the following expressions, respectively:

$$d_s(p^{(t)}, p^{(t-1)}) \stackrel{\text{def}}{=} \sum_x \left(p^{(t)}(x) - p^{(t-1)}(x) \right)^2,$$
$$d_h(p^{(t)}, p^{(t-1)}) \stackrel{\text{def}}{=} \sum_x \left(\sqrt{p^{(t)}(x)} - \sqrt{p^{(t-1)}(x)} \right)^2$$

For the score calculation device 62 to conduct these calculations, the degree of outlier calculation

device should be set to receive parameter values of $p^{(t)}$ and $p^{(t-1)}$ from the histogram calculation device 61. In addition, a logarithmic loss for input data x_t at a time t is calculated by the following expression:

5 $-\log p^{(t-1)}(x_t)$

The foregoing scores mean a change of an estimated distribution measured as a statistical distance or a logarithmic loss for an estimated distribution of input data and either case their statistical significance is unclear.

Fig. 13 is a diagram showing an entire structure of a degree of outlier calculation device according to a further embodiment of the present invention which employs the normal mixture density estimation device illustrated in Fig. 1 and the histogram calculation device illustrated in Fig. 9, while Fig. 14 is a flow chart showing operation thereof. Input data described both in a discrete value and a continuous value is sequentially input to a histogram calculation device 71, a cell determination device 73 and a score calculation device 74 (Step S71). Connected to the cell determination device 73 are a number N of probability density calculation devices 721 to 72N for a normal mixture. Here, N denotes the number of cells in the histogram of the histogram calculation device 71. To all the probability density calculation devices 721 to 72N

and the histogram calculation device 71, the score calculation device 74 is connected.

5 The histogram calculation device 71 calculates a parameter of the histogram only from a discrete data part of the input data (Step S72) and sends the same to the score calculation device 74. The cell determination device 73 determines to which cell of the histogram the discrete data part of the input data belongs (Step S73) and to the corresponding probability density estimation device, sends a continuous data part.

10 The probability density calculation devices 721 to 72N calculate a parameter of the probability density only when receiving the input data sent in (Step S74) and sends the parameter to the score calculation device 74. The score calculation device 74 calculates a score of the original input data with the input data, the output from the histogram calculation device 71 and any one of the outputs from the probability density calculation devices 721 to 72N as inputs (Step S75) and takes the score as an output (Step S76).

25 The score calculation device 74 calculates a score, for example, as a degree of a change in a probability distribution measured by a Hellinger distance or as a negative logarithmic likelihood (logarithmic loss) of a probability distribution with respect to input data. Denote a vector made up of categorical variables as x and a vector made up of

006267-495/99

continuous variables as y. A simultaneous distribution of x and y will be expressed as follows:

$$p(x, y) = p(x) p(y|x)$$

In the expression, p(x) represents a probability distribution of x which is expressed by a histogram density. p(y|x) represents a conditional probability distribution of y with x being applied. This is provided for each divisional region. With respect to new input data $D_t = (x_t, y_t)$, a Hellinger distance is calculated in the following manner.

$$d_h(p^{(t)}, p^{(t-1)}) = 2 - 2 \sum_x \sqrt{p^{(t)}(x)p^{(t-1)}(x)} \int \sqrt{p^{(t)}(y|x)p^{(t-1)}(y|x)} dy$$

These are immediately generalized into a distance between $p^{(t)}$ and $p^{(t-T)}$, with T as a positive integer.

In addition, a logarithmic loss is calculated according to the following expression:

$$-\log p^{(t-1)}(x_t) - \log p^{(t-1)}(y_t|x_t)$$

Fig. 15 is a diagram showing an entire structure of a degree of outlier calculation device according to the present invention which employs the kernel mixture distribution probability density estimation device illustrated in Fig. 5 and the histogram calculation device illustrated in Fig. 9, while Fig. 16 is a flow chart showing operation thereof. Input data described

both in a discrete value and a continuous value the stored parameter values is sequentially input to a histogram calculation device 81, a cell determination device 83 and a score calculation device 84 (Step S81).

5 To the cell determination device 83, a number N of probability density calculation devices 821 to 82N for a kernel mixture distribution are connected. Here, N denotes the number of cells in the histogram of the histogram calculation device 81.

10 To all the probability density calculation devices 821 to 82N and the histogram calculation device 81, the score calculation device 84 is connected. The histogram calculation device 81 calculates a parameter of the histogram only from a discrete data part of the input data (Step S82) and sends the same to the score
15 calculation device 84. The cell determination device 83 determines to which cell of the histogram the discrete data part of the input data belongs (Step S83) and to the corresponding probability density estimation device,
20 sends a continuous data part. The probability density calculation devices 821 to 82N calculate a parameter of the probability density only when receiving the input data sent in (Step S84) and sends the parameter to the score calculation device 84 (Step S85).

25 The score calculation device 84 calculates a score of the original input data with the input data, the output from the histogram calculation device 81 and

00675637-092900

any one of the outputs from the probability density
calculation devices 821 to 82N as inputs and takes the
score as an output (Step S86). The score calculation
method is the same as that of the degree of outlier
calculation device shown in Fig. 13.

Although the invention has been illustrated and
described with respect to exemplary embodiment thereof,
it should be understood by those skilled in the art that
the foregoing and various other changes, omissions and
additions may be made therein and thereto, without
departing from the spirit and scope of the present
invention. Therefore, the present invention should not
be understood as limited to the specific embodiment set
out above but to include all possible embodiments which
can be embodied within a scope encompassed and
equivalents thereof with respect to the feature set out
in the appended claims.

WHAT IS CLAIMED IS:

1. For use in a degree of outlier calculation device for sequentially calculating a degree of outlier of each data with a data sequence of real vector values as input, a probability density estimation device for, while
5 sequentially reading said data sequence, estimating a probability distribution of generation of the data in question by using a finite mixture distribution of normal distributions, comprising:

probability calculation means for calculating,
10 based on a value of input data and values of a mean parameter and a variance parameter of each of a finite number of normal distribution densities, a probability of generation of the input data in question from each normal distribution; and

15 parameter rewriting means for updating and rewriting the stored parameter values while forgetting past data, according to newly read data based on a probability obtained by the probability calculation means, values of a mean parameter and a variance
20 parameter of each normal distribution and a weighting parameter of each normal distribution.

2. The probability density estimation device as set forth in claim 1, further comprising

parameter storage means for storing values of a

mean parameter and a variance parameter of each of a
5 finite number of normal distribution densities and a
weighting parameter of each normal distribution, wherein
said parameter rewriting means updates and
rewrites data of said parameter storage means.

3. A degree of outlier calculation device for
sequentially calculating a degree of outlier of each
data with a data sequence of real vector values as input,
comprising:

5 a probability density estimation device for,
while sequentially reading said data sequence,
estimating a probability distribution of generation of
the data in question by using a finite mixture of normal
distributions including

10 (a) parameter storage means for storing values of
a mean parameter and a variance parameter of each of a
finite number of normal distribution densities and a
weighting parameter of each normal distribution,

15 (b) probability calculation means for calculating,
based on a value of input data and values of a mean
parameter and a variance parameter of each of a finite
number of normal distribution densities, a probability
of generation of the input data in question from each
normal distribution, and

20 (c) parameter rewriting means for updating and
rewriting the stored parameter values while forgetting

006260-4594960

past data, according to newly read data based on a probability obtained by the probability calculation means, values of a mean parameter and a variance parameter of each normal distribution and a weighting parameter of each normal distribution, and

degree of outlier calculation means for calculating and outputting a degree of outlier of said data by using a parameter of the normal mixture updated by said probability density estimation device and based on a probability distribution estimated from values of the parameters before and after the updating and the input data.

4. A probability density estimation device for use in a degree of outlier calculation device to, while sequentially reading a data sequence, estimate a probability distribution of generation of the data in question by using a finite number of normal kernel distributions, comprising:

parameter storage means for storing a value of a parameter indicative of a position of each kernel, and

parameter rewriting means for reading a value of a parameter from the storage means and updating the stored parameter values while forgetting past data, according to newly read data to rewrite the contents of the parameter storage means.

5. A degree of outlier calculation device for sequentially calculating a degree of outlier of each data with a data sequence of real vector values as input, comprising:

5 a probability density estimation device for, while sequentially reading said data sequence, estimating a probability distribution of generation of the data in question by using a finite number of normal kernel distributions including

10 (a) parameter storage means for storing a value of a parameter indicative of a position of each kernel, and

(b) parameter rewriting means for reading a value of a parameter from the storage means and updating the stored parameter values while forgetting past data, according to newly read data to rewrite the contents of the parameter storage means, and

15 degree of outlier calculation means for calculating and outputting a degree of outlier of said data by using said parameter updated by said probability density estimation device and based on a probability distribution estimated from values of the parameters before and after the updating and the input data.

20 6. For use in a degree of outlier calculation device for sequentially calculating a degree of outlier of each data with discrete value data as input, a histogram

09675637-092900

calculation device for calculating a parameter of a
5 histogram with respect to said discrete value data
sequentially input, comprising:

storage means for storing a parameter value of
said histogram, and

parameter updating means for reading said
10 parameter value from the storage means and updating past
parameter values while forgetting past data based on
input data to rewrite the value of said storage means,
thereby outputting some of parameter values of said
storage means.

15 7. A degree of outlier calculation device for
sequentially calculating a degree of outlier of each
data with discrete value data as input, comprising:

a histogram calculation device for calculating a
5 parameter of a histogram with respect to said discrete
value data sequentially input including

storage means for storing a parameter value of
said histogram, and

parameter updating means for reading said
10 parameter value from the storage means and updating past
parameter values while forgetting past data based on
input data to rewrite the value of said storage means,
thereby outputting some of parameter values of said
storage means, and

15 score calculation means for calculating, based on

the output of the histogram calculation device and said input data, a score of the input data in question with respect to said histogram, thereby outputting the output of the score calculation means as a degree of outlier of said input data.

8. A degree of outlier calculation device for calculating a degree of outlier with respect to sequentially input data which is described both in a discrete value and a continuous value , comprising:

a histogram calculation device for estimating a histogram with respect to a discrete value data part, probability density estimation devices provided as many as the number of cells of said histogram for estimating a probability density with respect to a continuous value data part,

cell determination means for determining to which cell of said histogram said discrete value data part belongs to send the continuous data part to the corresponding one of said probability density estimation devices, and

score calculation means for calculating a score of said input data based on a probability distribution estimated from output values of said histogram calculation device and said probability density estimation device and said input data, thereby

outputting the output of the score calculation

means as a degree of outlier of said input data,
said histogram calculation device including
storage means for storing a parameter value of
25 said histogram, and

parameter updating means for reading said
parameter value from the storage means and updating past
parameter values while forgetting past data based on
input data to rewrite the value of said storage means,
30 thereby outputting some of parameter values of said
storage means, and

said probability density estimation device
including

parameter storage means for storing values of a
35 mean parameter and a variance parameter of each of a
finite number of normal distribution densities and a
weighting parameter of each normal distribution,

probability calculation means for calculating,
based on a value of input data, and values of a mean
40 parameter and a variance parameter of each of a finite
number of normal distribution densities, a probability
of generation of the input data in question from each
normal distribution, and

parameter rewriting means for updating and
45 rewriting the stored parameter values while forgetting
past data, according to newly read data based on a
probability obtained by the probability calculation
means, values of a mean parameter and a variance

parameter of each normal distribution and a weighting
parameter of each normal distribution.

9. A degree of outlier calculation device for
calculating a degree of outlier with respect to
sequentially input data which is described both in a
discrete value and a continuous value , comprising:

a histogram calculation device for estimating a
histogram with respect to said discrete value data part,
probability density estimation devices provided
as many as the number of cells of said histogram for
estimating a probability density with respect to a
continuous value data part,

cell determination means for determining to which
cell of the histogram said discrete value data part
belongs to send the continuous data part to the
corresponding one of said probability density estimation
devices, and

score calculation means for calculating a score
of said input data based on a probability distribution
estimated from output values of said histogram
calculation device and said probability density
estimation device and said input data, thereby

outputting the output of the score calculation
means as a degree of outlier of said input data,

said histogram calculation device including
storage means for storing a parameter value of

25 said histogram, and

parameter updating means for reading said
parameter value from the storage means and updating past
parameter values while forgetting past data based on
input data to rewrite the value of said storage means,
30 thereby outputting some of parameter values of said
storage means, and

said probability density estimation device
including

parameter storage means for storing a value of a
35 parameter indicative of a position of each kernel, and

parameter rewriting means for reading a value of
a parameter from the storage means and updating the
stored parameter values while forgetting past data,
according to newly read data to rewrite the contents of
40 the parameter storage means.

10. For use in a degree of outlier calculation device
for sequentially calculating a degree of outlier of each
data with a data sequence of real vector values as input,
a probability density estimation method of, while
5 sequentially reading said data sequence, estimating a
probability distribution of generation of the data in
question by using a finite mixture of normal
distributions, comprising the steps of:

based on values of a mean parameter and a
10 variance parameter of each of a finite number of normal

distribution densities read from parameter storage means for storing a value of input data, values of a mean parameter and a variance parameter of each of a finite number of normal distribution densities, and a weighting parameter of each normal distribution, calculating a probability of generation of the input data in question from each normal distribution, and

updating the stored parameter values while forgetting past data, according to newly read data based on a probability obtained by the probability calculation means, values of a mean parameter and a variance parameter of each normal distribution and a weighting parameter of each normal distribution to rewrite data of said parameter storage means.

11. A degree of outlier calculation method of sequentially calculating a degree of outlier of each data, with a data sequence of real vector values as input, wherein

probability density estimation for, while sequentially reading said data sequence, estimating a probability distribution of generation of the data in question by using a finite mixture of normal distributions, comprises the steps of:

based on values of a mean parameter and a variance parameter of each of a finite number of normal distribution densities read from parameter storage means

for storing a value of input data, values of a mean
parameter and a variance parameter of each of a finite
15 number of normal distribution densities, and a weighting
parameter of each normal distribution, calculating a
probability of generation of the input data in question
from each normal distribution, and

updating the stored parameter values while
20 forgetting past data, according to newly read data based
on a probability obtained by the probability calculation
means, values of a mean parameter and a variance
parameter of each normal distribution and a weighting
parameter of each normal distribution to rewrite data of
25 said parameter storage means, and which further
comprises the step of:

calculating and outputting a degree of outlier of
said data by using a parameter of the finite mixture
distribution updated by said probability density
30 estimation and based on a probability distribution
estimated from values of the parameters before and after
the updating and the input data.

12. A probability density estimation method for use
in calculation of a degree of outlier to, while
sequentially reading a data sequence, estimate a
probability distribution of generation of the data in
5 question by using a finite number of normal kernel
distributions, comprising the steps of:

storing a value of a parameter indicative of a position of each kernel in parameter storage means, and

10 reading a value of a parameter from the storage means and updating the stored parameter values while forgetting past data, according to newly read data to rewrite the contents of the parameter storage means.

13. A degree of outlier calculation method of sequentially calculating a degree of outlier of each data, with a data sequence of real vector values as input, wherein

5 probability density estimation for, while sequentially reading said data sequence, estimating a probability distribution of generation of the data in question by using a finite number of normal kernel distributions comprises the steps of:

10 storing a value of a parameter indicative of a position of each kernel in parameter storage means,

reading a value of a parameter from the storage means and updating the stored parameter values while forgetting past data, according to newly read data to
15 rewrite the contents of the parameter storage means, and which further comprises:

degree of outlier calculation means for
calculating and outputting a degree of outlier of said data by using said parameter updated by said probability
20 density estimation and based on a probability

006260 "0963" 09600

distribution estimated from values of the parameters before and after the updating and the input data.

14. For use in calculation of a degree of outlier for sequentially calculating a degree of outlier of each data with discrete value data as input, a histogram calculation method of calculating a parameter of a histogram with respect to said discrete value data sequentially input, comprising the steps of:

reading said parameter value from storage means for storing a parameter value of said histogram and updating past parameter values while forgetting past data based on input data to rewrite the value of said storage means, and

outputting some of parameter values of said storage means.

15. A degree of outlier calculation device for sequentially calculating a degree of outlier of each data with discrete value data as input, comprising:

a histogram calculation device for calculating a parameter of a histogram with respect to said discrete value data sequentially input including

storage means for storing a parameter value of said histogram, and

parameter updating means for reading said parameter value from the storage means and updating past

parameter values while forgetting past data based on
input data to rewrite the value of said storage means,
thereby outputting some of parameter values of said
storage means, and

15 score calculation means for calculating, based on
the output of the histogram calculation device and said
input data, a score of the input data in question with
respect to said histogram, thereby outputting the score
calculation result as a degree of outlier of said input
20 data.

16. A degree of outlier calculation method of
calculating a degree of outlier with respect to
sequentially input data which is described both in a
discrete value and a continuous value , wherein

5 histogram calculation which estimates a histogram
with respect to a discrete value data part comprises the
steps of:

 reading said parameter value from storage means
for storing a parameter value of said histogram and
10 updating past parameter values while forgetting past
data based on input data to rewrite the value of said
storage means, and

 outputting some of parameter values of said
storage means, and wherein

15 in probability density estimation devices
provided as many as the number of cells of said

09675637-092900

histogram for estimating a probability density with respect to a continuous value data part, said method comprises the steps of:

20 based on values of a mean parameter and a variance parameter of each of a finite number of normal distribution densities read from parameter storage means for storing a value of input data, values of a mean parameter and variance parameter of each of a finite
25 number of normal distribution densities and a weighting parameter of each normal distribution, calculating a probability of generation of the input data in question from each normal distribution, and

 based on a probability obtained by the
30 probability calculation means, values of a mean parameter and a variance parameter of each normal distribution and a weighting parameter of each normal distribution, updating the stored parameter values while forgetting past data, according to newly read data to
35 rewrite the data of said parameter storage means, and wherein said method further comprises the steps of:

 determining to which cell of said histogram said discrete value data part belongs to send the continuous data part to the corresponding one of said probability
40 density estimation devices,

 calculating a score of said input data based on a probability distribution estimated from output values of said histogram calculation device and said probability

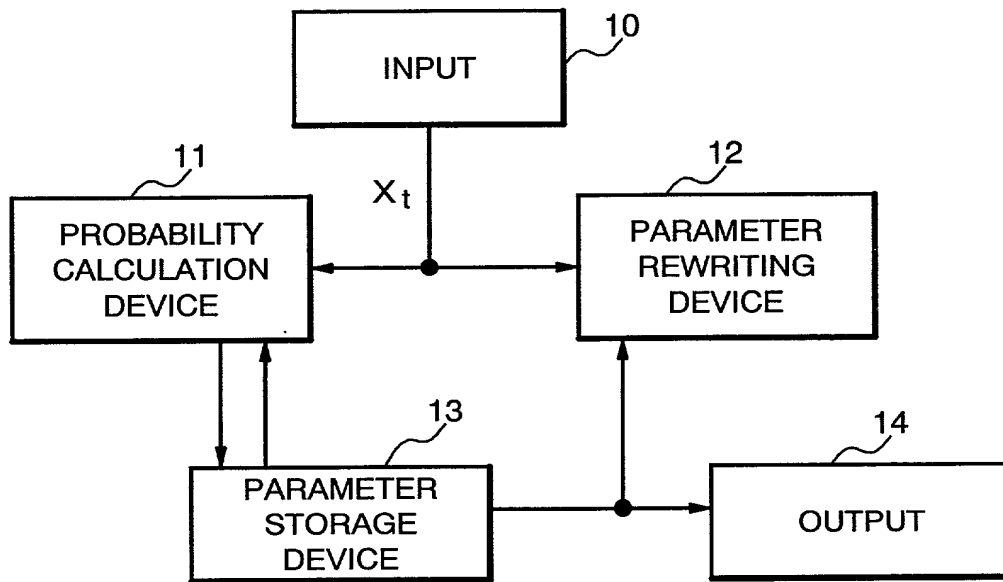
density estimation device and said input data, and
45 outputting the score calculation result as a
degree of outlier of said input data.

006260" 0963/960

ABSTRACT OF THE DISCLOSURE

Degree of outlier of one input data is calculated by an amount of change in a learned probability density from that before learning as a result of taking in of the input data. This is because data largely differing in a tendency from a so far learned probability density function can be considered to have a high degree of outlier. More specifically, a function of a distance between probability densities before and after data input is calculated as a degree of outlier. Accordingly, a probability density estimation device appropriately estimates a probability distribution of generation of unfair data while sequentially reading a large volume of data and a score calculation device calculates and outputs a degree of outlier of each data based on the estimated probability distribution.

006250 2E95/950

FIG. 1

PROBABILITY DENSITY ESTIMATION DEVICE
(NORMAL MIXED DISTRIBUTION)

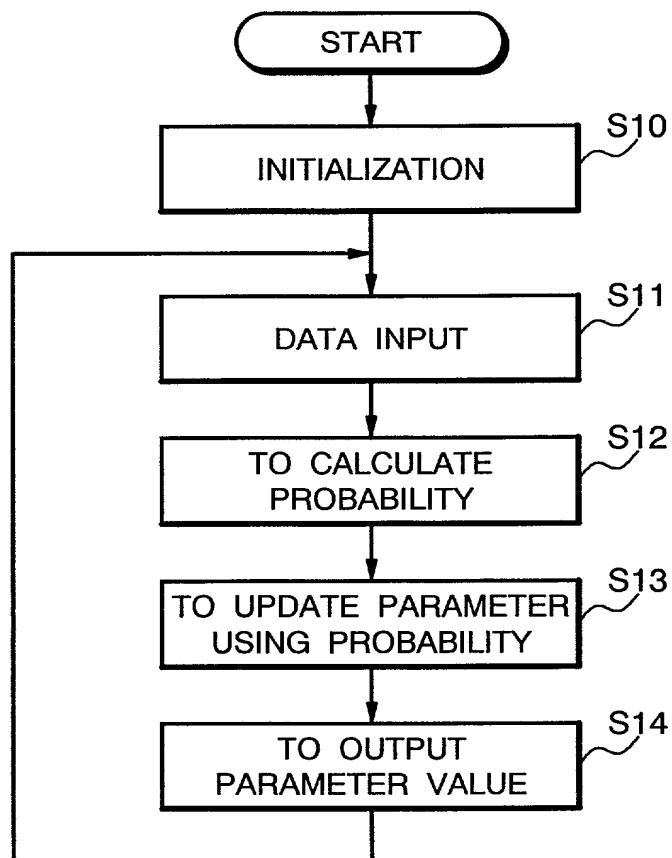
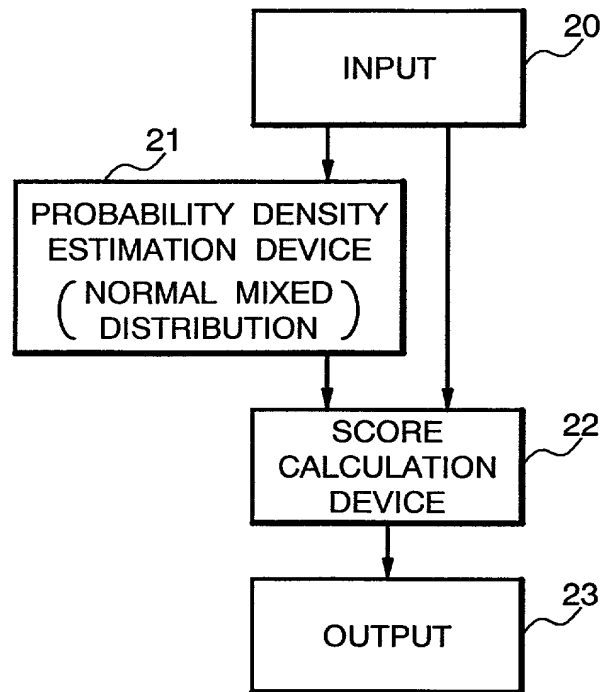
FIG. 2

FIG. 3

DEGREE OF OUTLIER CALCULATION DEVICE

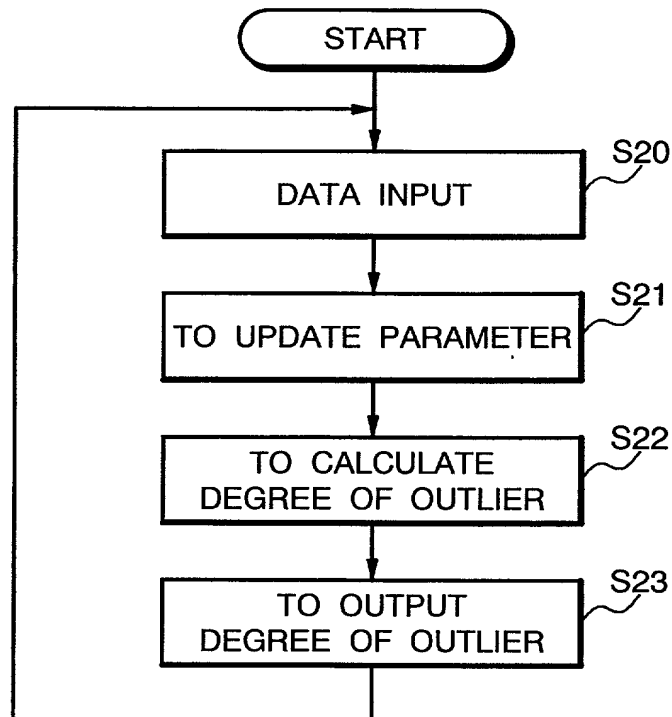
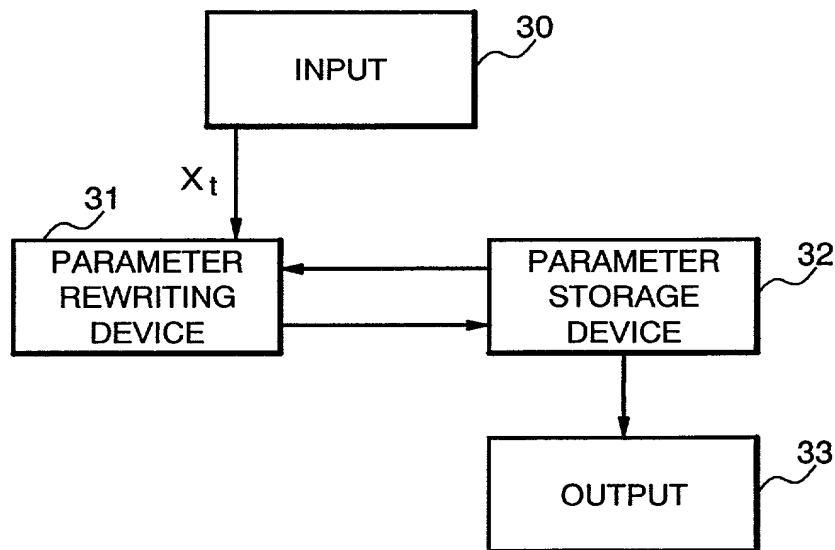
FIG. 4

FIG. 5

PROBABILITY DENSITY ESTIMATION DEVICE
(KERNEL MIXED DISTRIBUTION)

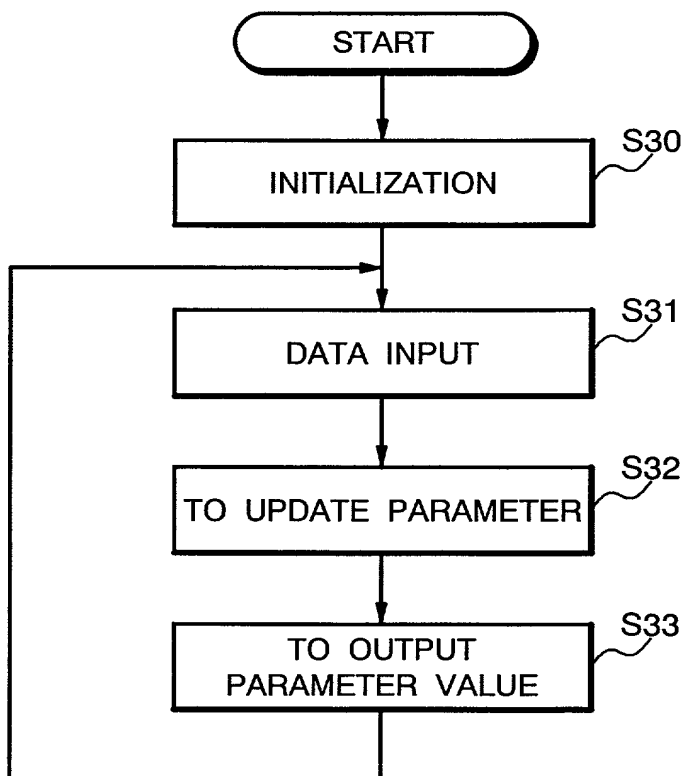
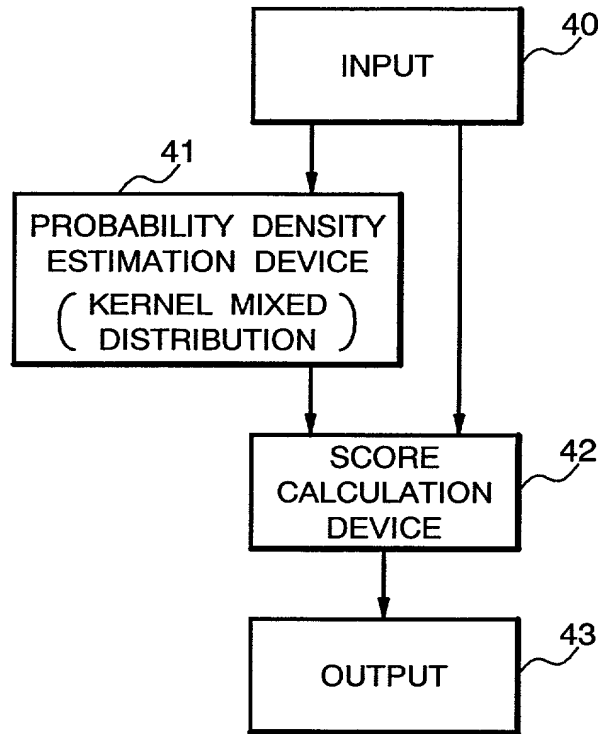
FIG. 6

FIG. 7

DEGREE OF OUTLIER CALCULATION DEVICE

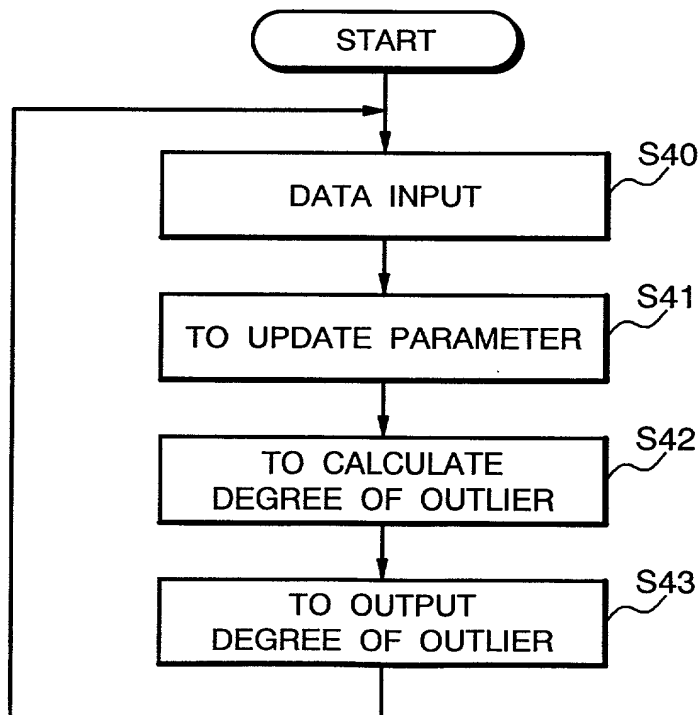
FIG. 8

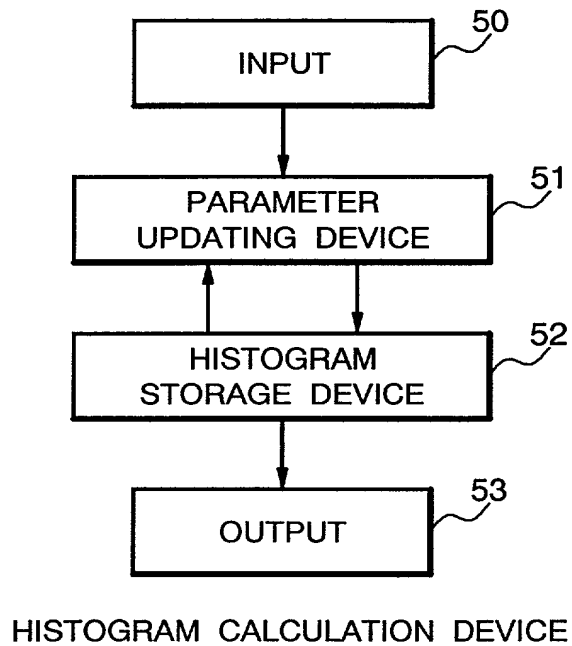
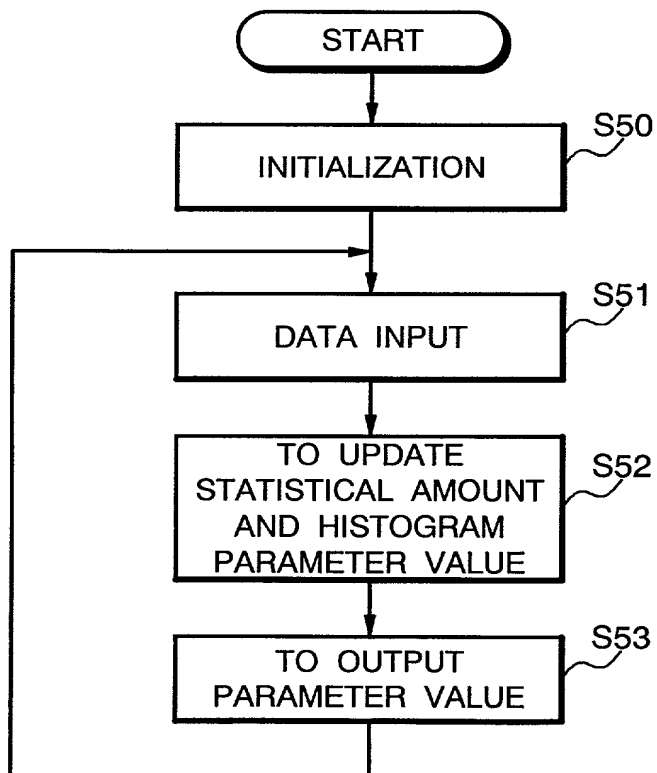
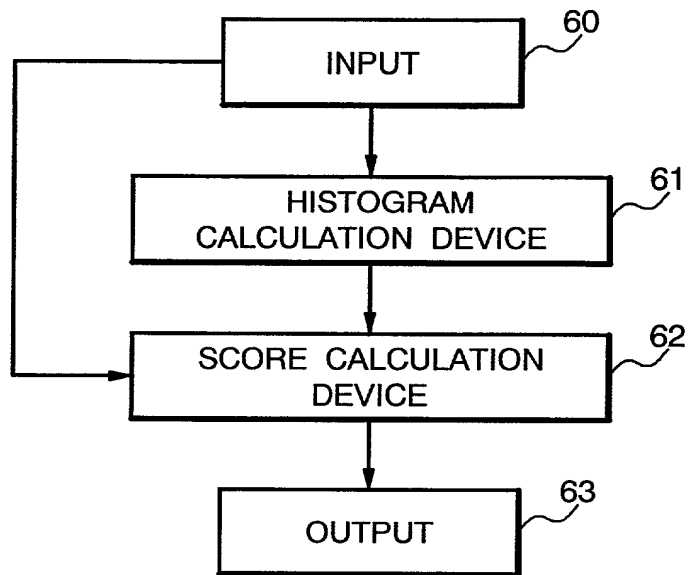
FIG. 9**FIG. 10**

FIG. 11

DEGREE OF OUTLIER CALCULATION DEVICE

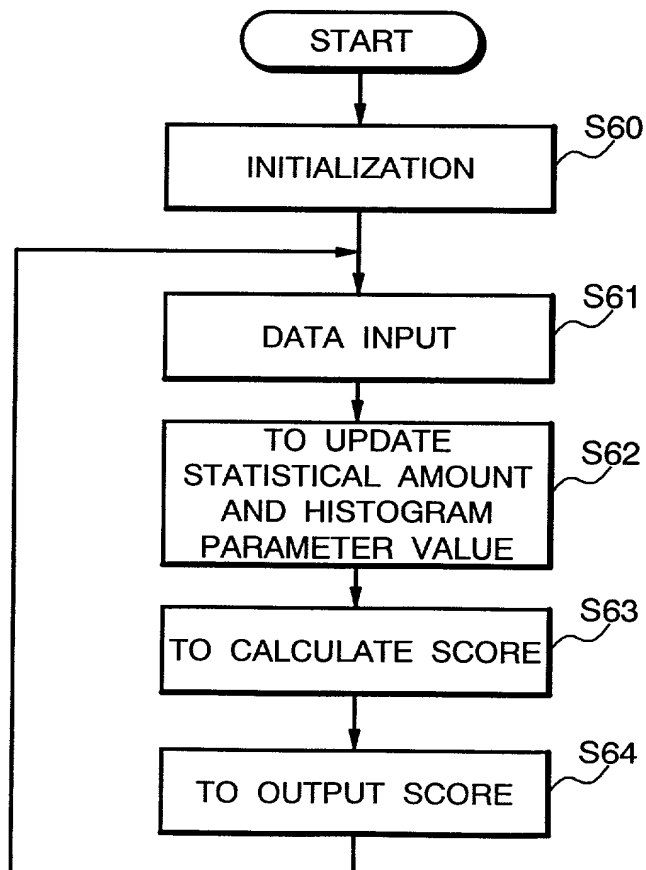
FIG. 12

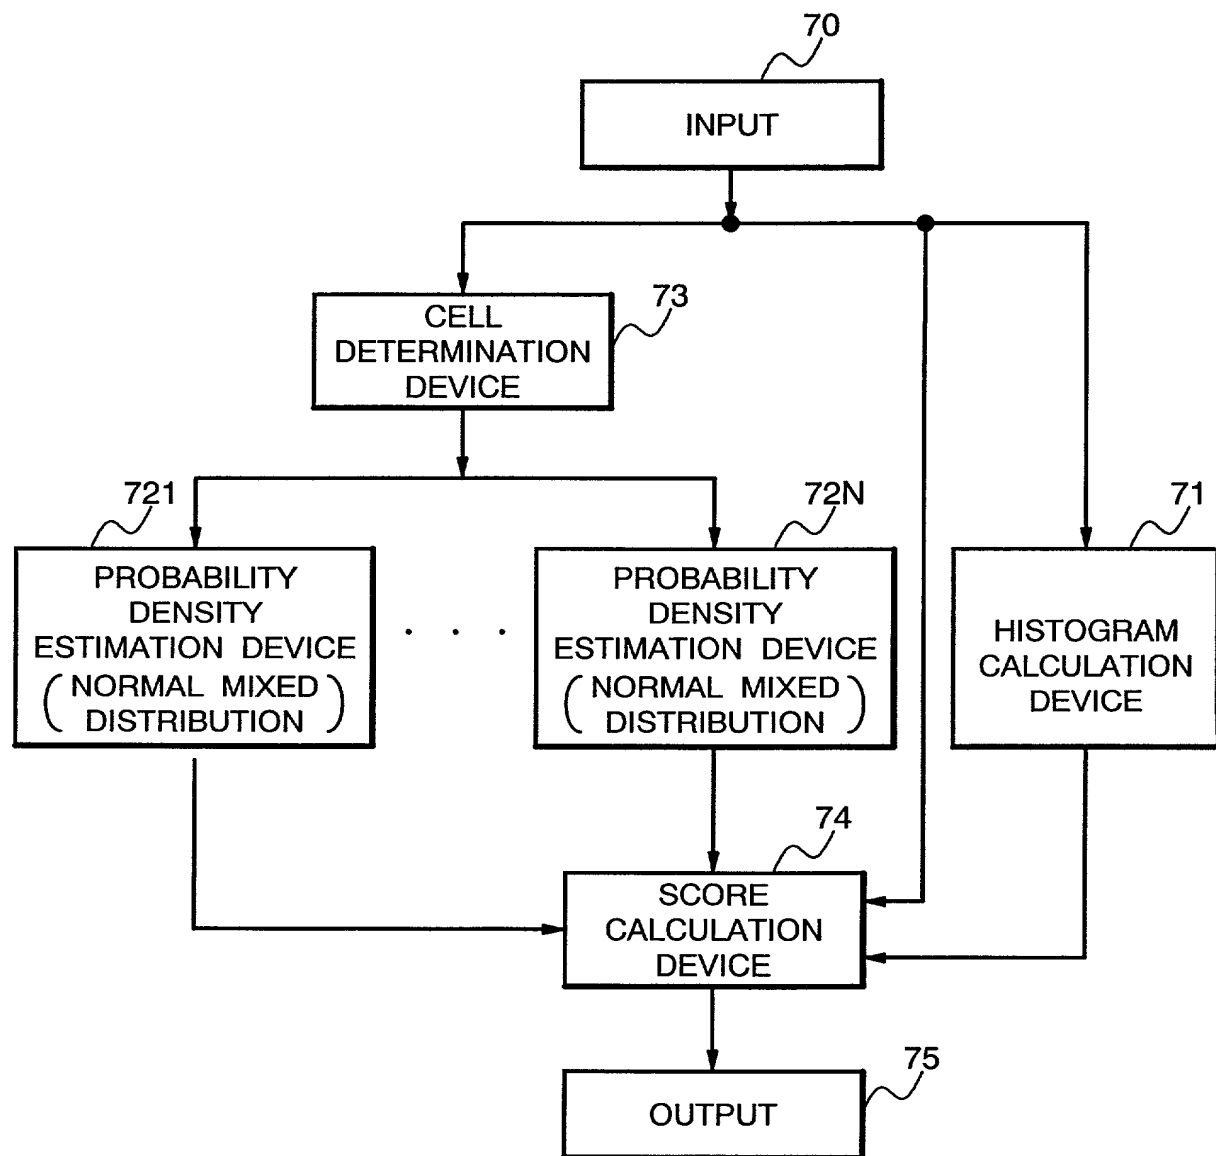
FIG. 13**DEGREE OF OUTLIER CALCULATION DEVICE**

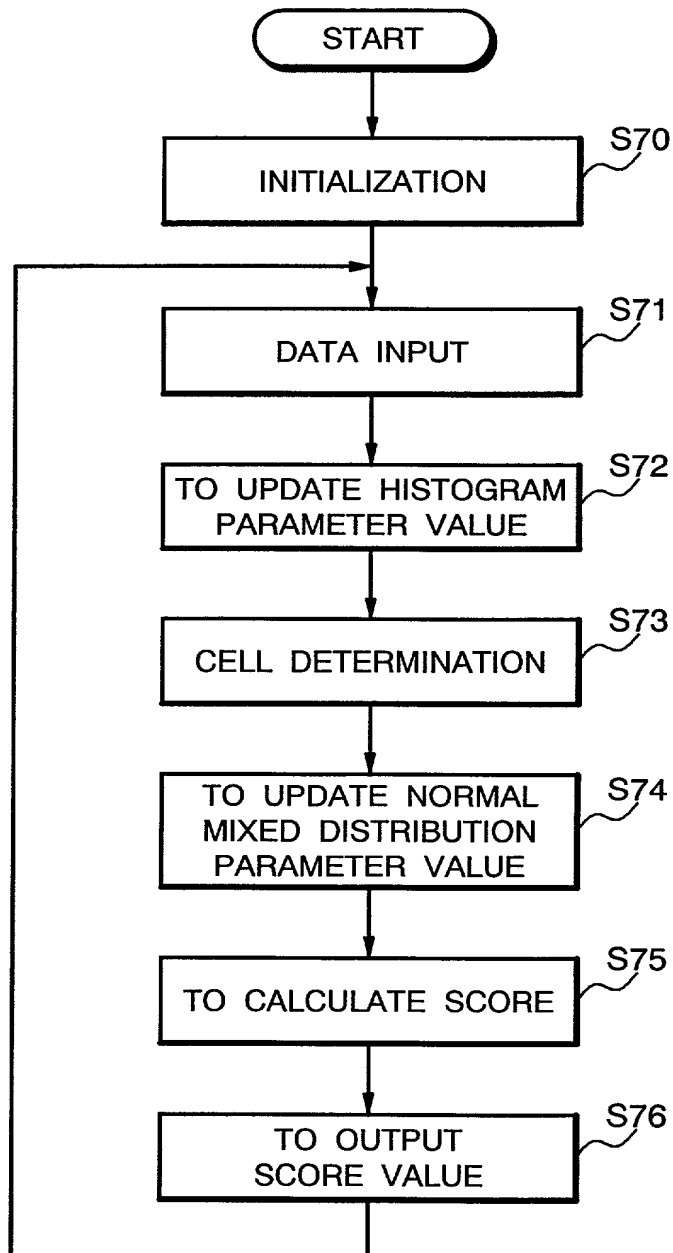
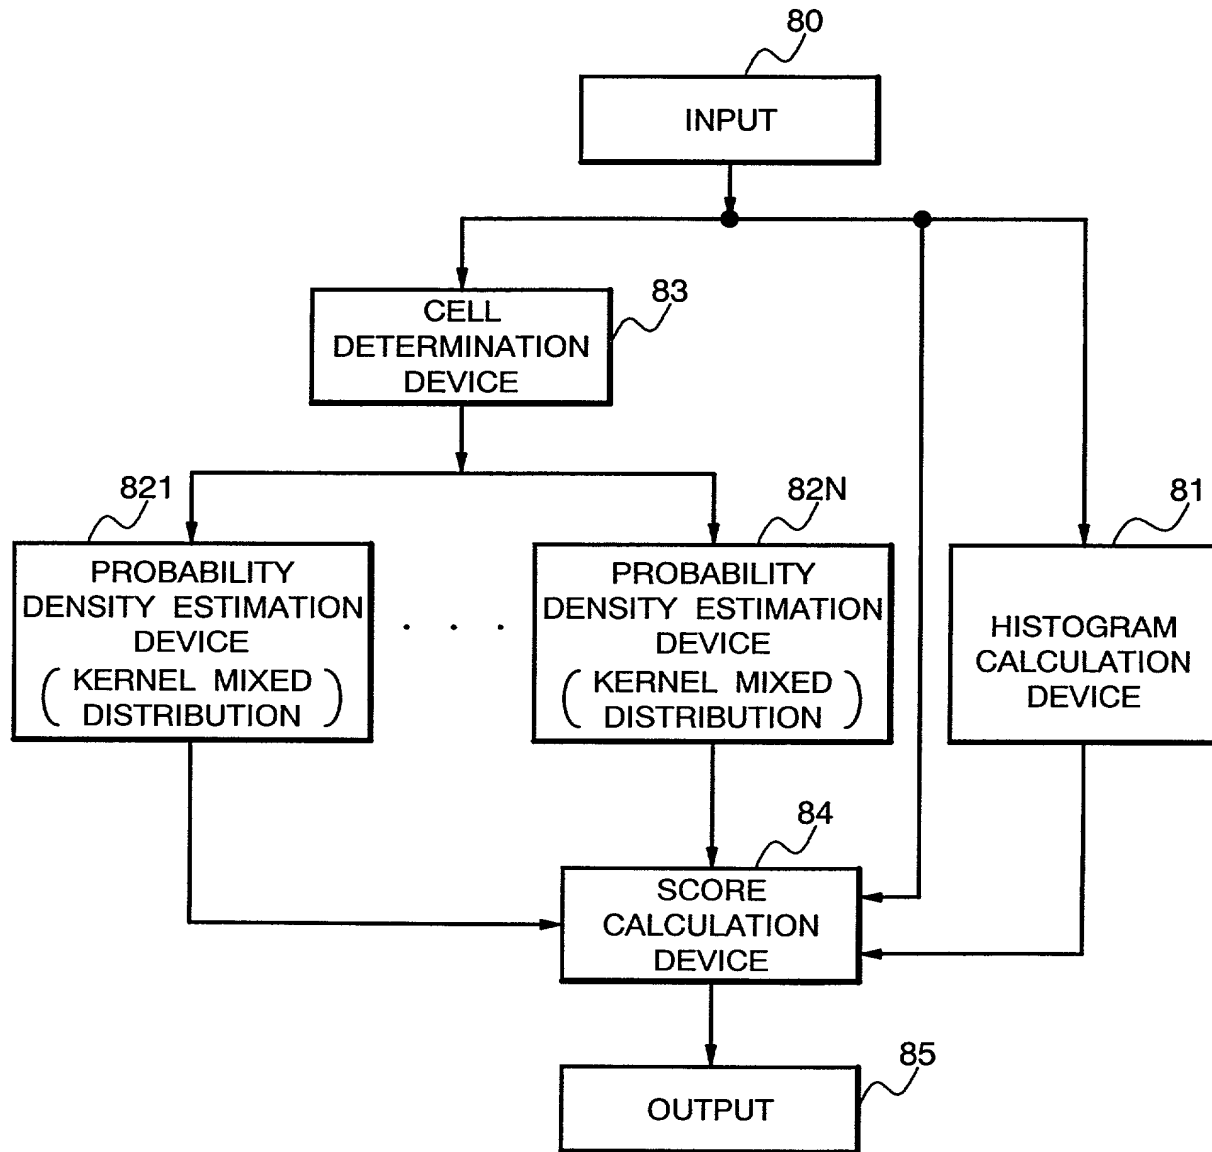
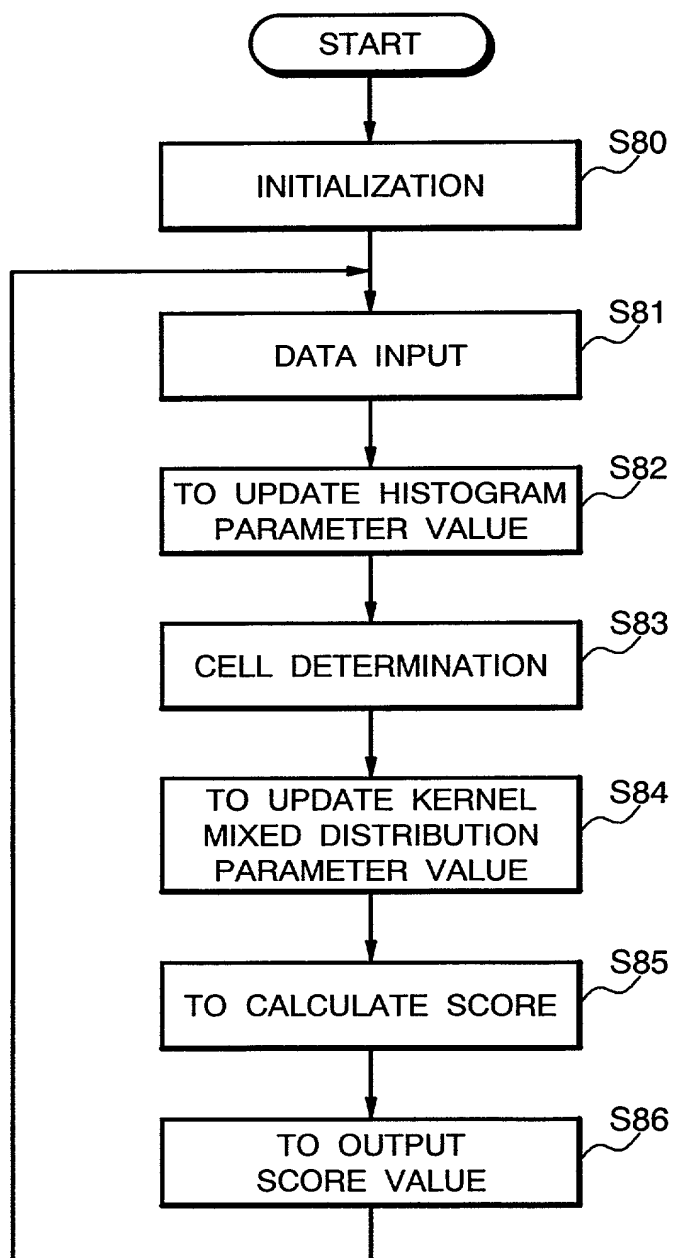
FIG. 14

FIG. 15

DEGREE OF OUTLIER CALCULATION DEVICE

FIG. 16

Docket No.

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

DEGREE OF OUTLIER CALCULATION DEVICE, AND PROBABILITY DENSITY ESTIMATION
DEVICE AND FORGETFUL HISTOGRAM CALCULATION DEVICE FOR USE THEREIN

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International

Application Number _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

275437/1999	Japan	29/September/1999	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Stephen D. Murphy, Reg. No.: 22,002

Paul J. Esatto, Reg. No.: 30,749

William C. Roch, Reg. No.: 24,972

Mark J. Cohen, Reg. No.: 32,211

Frank S. DiGiglio, Reg. No.: 31,346

Donald T. Black, Reg. No.: 27,999

Send Correspondence to: Paul J. Esatto, Jr.
Scully, Scott, Murphy & Presser
400 Garden City Plaza
Garden City, New York 11530

Direct Telephone Calls to: *(name and telephone number)*
Paul J. Esatto, Jr. (516) 742-4343

Full name of sole or first inventor	
Kenji YAMANISHI	
Sole or first inventor's signature	Date
<i>Kenji Yamanishi</i>	September 22, 2000
Residence	
Tokyo, Japan	
Citizenship	
Japan	
Post Office Address	
c/o NEC Corporation, 7-1,	
Shiba 5-chome, Minato-ku, Tokyo, Japan	

Full name of second inventor, if any	
Jun-ichi TAKEUCHI	
Second inventor's signature	Date
<i>Junichi Takeuchi</i>	September 22, 2000
Residence	
Tokyo, Japan	
Citizenship	
Japan	
Post Office Address	
c/o NEC Corporation, 7-1,	
Shiba 5-chome, Minato-ku, Tokyo, Japan	